

Version	1
Total pages	20
Date	2002.06.20

Product Specification

7" color TFT-LCD module

MODEL NAME: A070FW02

(◆) Preliminary Specification

(....) Final Specification



3-5 rue du Jura
Bâtiment Tokyo - Silic 586
94663 RUNGIS Cedex - FRANCE
Tél. : +33 (0) 1 49 78 88 88
Fax : + 33 (0) 1 49 78 88 89
www.axess-technology.com
contact@axess-technology.com

Note: The content of this specification is subject to change.

© 2002 AU Optronics
All Rights Reserved,
Do Not Copy.

Record of Revision

[illegible]

Contents:

A. Physical specification.....	P3
B. Electrical specifications.....	P4
1. Pin assignment.....	P4
a. TFT-LCD panel driving section.....	P4
b. Backlight driving section.....	P5
2. Absolute maximum ratings.....	P5
3. Environment conditions	
4. Electrical characteristics.....	P6
a. Typical operating conditions.....	P6
b. Current consumption.....	P6
c. Backlight driving conditions.....	P6
5. AC Timing.....	P7
a. Timing conditions.....	P7
b. Timing diagram.....	P7
C. Optical specifications.....	P8
D. Reliability test items.....	P10
E. Packing form	P11

Appendix:

Fig.1 Outline dimension of TFT-LCD module.....	P12
Fig.2 Sampling clock timing.....	P14
Fig.3 Horizontal display timing range.....	P15
Fig.4-(a) Horizontal timing.....	P16
Fig.4- (b) Detail horizontal timing.....	P17
Fig.5 Vertical shift clock timing.....	P18
Fig.6- (a) Vertical timing (From up to down).....	P19
Fig.6-(b) Vertical timing (From down to up)	P20

A. Physical specifications

NO.	Item	Specification	Remark
1	Display resolution(dot)	1440(W)×234(H)	
2	Active area(mm)	154.08W)×86.58(H)	
3	Screen size(inch)	7.0(Diagonal)	
4	Dot pitch(mm)	0.107(W)×0.370(H)	
5	Color configuration	R. G. B. stripe	
6	Overall dimension(mm)	167.1(W)×102(H)×8(D)	Note 1
7	Weight(g)	200 ±10	
8	Surface treatment	AG(5.5%) with WV film	
9	Backlight unit	L type lamp	

Note 1: Refer to Fig. 1



3-5 rue du Jura
Bâtiment Tokyo - Silic 586
94663 RUNGIS Cedex - FRANCE
Tél. : +33 (0) 1 49 78 88 88
Fax : + 33 (0) 1 49 78 88 89
www.axess-technology.com
contact@axess-technology.com

B. Electrical specifications

1.Pin assignment

a. TFT-LCD panel driving section


Pin no	Symbol	I/O	Description	Remark
1	GND	-	Ground for logic circuit	
2	V _{CC}	I	Supply voltage of logic control circuit for scan driver	
3	V _{GL}	I	Negative power for scan driver	
4	V _{GH}	I	Positive power for scan driver	
5	STVR	I/O	Vertical start pulse	Note 1
6	STVL	I/O	Vertical start pulse	Note 1
7	CKV	I	Shift clock input for scan driver	
8	U/D	I	UP/DOWN scan control input	Note 1,2
9	OE _V	I	Output enable input for scan driver	
10	V _{COM}	I	Common electrode driving signal	
11	V _{COM}	I	Common electrode driving signal	
12	L/R	I	LEFT/RIGHT scan control input	Note 1,2
13	MOD	I	Sequential sampling and simultaneous sampling setting	Note 3
14	OE _H	I	Output enable input for data driver	
15	STHL	I/O	Start pulse for horizontal scan line	Note 1
16	STHR	I/O	Start pulse for horizontal scan line	Note 1
17	CPH3	I	Sampling and shifting clock pulse for data driver	
18	CPH2	I	Sampling and shifting clock pulse for data driver	
19	CPH1	I	Sampling and shifting clock pulse for data driver	
20	V _{CC}	I	Supply voltage of logic control circuit for data driver	
21	GND	-	Ground for logic circuit	
22	VR	I	Alternated video signal input(Red)	
23	VG	I	Alternated video signal input(Green)	
24	VB	I	Alternated video signal input(Blue)	
25	AV _{DD}	I	Supply voltage for analog circuit	
26	AV _{SS}	-	Ground for analog circuit	

Note 1: Selection of scanning mode (please refer to the following table)

Setting of scan control input		IN/OUT state for start pulse				Scanning direction
U/D	L/R	STVR	STVL	STHR	STHL	
GND	V _{CC}	OUT	IN	OUT	IN	From up to down, and from left to right.
V _{CC}	GND	IN	OUT	IN	OUT	From down to up, and from right to left.
GND	GND	OUT	IN	IN	OUT	From up to down, and from right to left.
V _{CC}	V _{CC}	IN	OUT	OUT	IN	From down to up, and from left to right.

IN: Input; OUT: Output.

Note 2: Definition of scanning direction, Refer to figure as below:

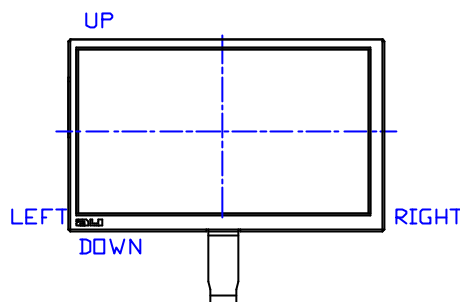

Note 3: MOD = H: Simultaneous sampling.

MOD = L: Sequential sampling.

Please set CPH2 and CPH3 to GND when MOD = H.

b. Backlight driving section (Refer to Fig. 1)

No.	Symbol	I/O	Description	Remark
1	HI	I	Power supply for backlight unit (High voltage)	
2	GND	-	Ground for backlight unit	

2. Absolute maximum ratings

Item	Symbol	Condition	Min.	Max.	Unit	Remark
Power voltage	V_{CC}	GND=0	-0.3	7	V	
	AV_{DD}	$AV_{SS}=0$	-0.3	7	V	
	V_{GH}	GND=0	-0.3	18	V	
	V_{GL}		-15	0.3	V	
	$V_{GH}-V_{GL}$		-	33	V	
Input signal voltage	V_i		-0.3	$AV_{DD}+0.3$	V	Note 1
	V_I		-0.3	$V_{CC}+0.3$	V	Note 2
	VCOM		-2.9	5.2	V	

Note 1: VR, VG, VB.

Note 2: STHL, STHR, OEH, L/R, CPH1~CPH3, STVR, STVL, OEV, CKV, U/D.

3. Environment condition

Item		Condition	Spec.	Remark
Operating temperature	Panel with lighting BLU	Ambient (panel surface)	-30 ~70°C (-20 ~90°C)	Note 1,2,3
	Panel	Panel surface	-20 ~90°C	
Storage temperature	Panel with lighting BLU	Surface temperature	-40 ~95°C	Note 4
	Panel	Surface temperature	-40 ~95°C	

Note 1: Under the condition of the operating temperature, the panel would be function normal for the visual display only. For contrast, response time, and other factors related to display

quality, determine temperature using the formula $T_a=25^{\circ}\text{C}$

Note 2: Panel surface temperature is defined as the maximum temperature of panel surface. In general, the lamp side temperature is higher than non-lamp side around 10°C

Note 3: The backlight has been turned on before running about condition.

Note 4: BLU is off

4. Electrical characteristics

a. Typical operating conditions (GND=AVss=0V, Note 4)

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply	V_{CC}	3	5	5.2	V	
	AV_{DD}	4.8	5	5.2	V	
	V_{GH}	14.3	15	15.7	V	
	V_{GL}	-10.5	-10	-9.5	V	
Video signal amplitude (VR,VG,VB)	V_{iA}	0.4	-	$AV_{DD}-0.4$	V	Note 1
	V_{iAC}	-	3	-	V	AC component
	V_{iDC}	-	$AV_{DD}/2$	-	V	DC component
VCOM	V_{CAC}	3.5	5.6	6.5	Vp-p	AC component, Note 2
	V_{CDC}	1.4	1.7	2.0	V	DC component
Input signal voltage	H Level	V_{IH}	$0.8 V_{CC}$	-	V_{CC}	Note 3
	L Level	V_{IL}	0	-	$0.2 V_{CC}$	

Note 1: Refer to Fig.4- (a).

Note 2: The brightness of LCD panel could be changed by adjusting the AC component of VCOM.

Note 3: STHL, STHR, OEH, L/R, CPH1~CPH3, STVR, STVL, OEV, CKV, U/D.

Note 4: Be sure to apply GND, V_{CC} and V_{GL} to the LCD first, and then apply V_{GH} .

b. Current consumption (GND=AVss=0V)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Current for driver	I_{GH}	$V_{GH}=15\text{V}$	-	0.20	0.5	mA	
	I_{GL}	$V_{GL}=-10\text{V}$	-	0.80	1.5	mA	
	I_{CC}	$V_{CC}=5\text{V}$	-	3.0	6.0	mA	
	I_{DD}	$AV_{DD}=5\text{V}$	-	17.0	30	mA	

c. Backlight driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp voltage	V_L	-	(580)	(640)	Vrms	
Lamp current	I_L	-	6	7	mAmps	
Frequency	F_L	-	60	80	kHz	Note 4
Lamp starting voltage	V_S	-	-	870	Vrms	Note 1,5
		-	-	1150	Vrms	Note 2,5
		-	-	1300	Vrms	Note 3,5
Lamp life time		(25000)	(40000)	-	Hr	Note 6

Note 1: $T_a = 25^{\circ}\text{C}$.

Note 2: $T_a = 0^{\circ}\text{C}$.

Note 3: $T_a = -30^{\circ}\text{C}$.

Note 4: The lamp frequency should be selected as different as possible from display horizontal synchronous signal to avoid interference.

Note 5: For starting the backlight unit, the output voltage of DC/AC' s transformer should be larger than the maximum lamp starting voltage.

Note 6: The" Lamp life time" is defined as the module brightness decrease to 50% original brightness at Ta=25°C , I_L=6mA.

5. AC Timing

a. Timing conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
Rising time	t _r	-	-	10	ns	Note 1
Falling time	t _f	-	-	10	ns	Note 1
High and low level pulse width	t _{CPH}	99	103	107	ns	CPH1~CPH3
CPH pulse duty	t _{CWH}	40	50	60	%	CPH1~CPH3
CPH pulse delay	t _{C12} t _{C23} t _{C31}	30	t _{CPH} /3	t _{CPH} /2	ns	CPH1~CPH3
STH setup time	t _{SUH}	20	-	-	ns	STHR,STHL
STH hold time	t _{HDH}	20	-	-	Ns	STHR,STHL
STH pulse width	t _{STH}	-	1	-	t _{CPH}	STHR,STHL
STH period	t _H	61.5	63.5	65.5	μs	STHR,STHL
OEH pulse width	t _{OEH}	-	1.22	-	μs	OEH
Sample and hold disable time	t _{DIS1}	-	8.28	-	μs	
OEV pulse width	t _{OEV}	-	5.40	-	μs	OEV
CKV pulse width	t _{CKV}	-	4.18	-	μs	CKV
Clean enable time	t _{DIS2}	-	3.74	-	μs	
Horizontal display start	t _{SH}	-	0	-	T _{CPH} /3	
Horizontal display timing range	t _{DH}	-	1440	-	T _{CPH} /3	
STV setup time	t _{SUV}	400	-	-	ns	STVL,STVR
STV hold time	t _{HDV}	400	-	-	ns	STVL,STVR
STV pulse width	t _{STV}	-	-	1	t _H	STVL,STVR
Horizontal lines per field	t _V	256	262	268	t _H	Note 2
Vertical display start	t _{SV}		3	-	t _H	
Vertical display timing range	t _{DV}		234	-	t _H	
VCOM rising time	t _{rCOM}		-	5	μs	
VCOM falling time	t _{fCOM}		-	5	μs	
VCOM delay time	t _{DCOM}		-	3	μs	
RGB delay time	t _{DRGB}		-	1	μs	

Note 1: For all of the logic signals.

Note 2: Please don' t use odd horizontal lines to drive LCD panel for both odd and even field simultaneously.

b. Timing diagram

Please refer to the attached drawing, from Fig.2 to Fig.6.

C. Optical specification (Note 1, Note 2)


Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response time	Rise	Tr Tf	$\theta = 0^\circ$	-	25	50	ms	Note 3,5
	Fall			-	30	60	ms	
Contrast ratio		CR	At optimized Viewing angle	60	300	-		Note 4, 5
Viewing angle	Top		$CR \geq 10$	20	40	-	deg.	Note 5, 6
	Bottom			40	55	-		
	Left			45	60	-		
	Right			45	60	-		
Viewing angle	Top		$CR \geq 5$	30	50	-	deg.	Note 5, 6
	Bottom			60	70	-		
	Left			60	70	-		
	Right			60	70	-		
Brightness		Y _L	I _L =6mA, 25°C	350	500	-	nit	Note 7
			I _L =9.5mA, -10°C, 1min	100	190		nit	
			I _L =11mA, -20°C, 1min	-	-	-	nit	
White chromaticity		X	$\theta = 0^\circ$	0.26	0.31	0.36		Note 7
		Y	$\theta = 0^\circ$	0.28	0.33	0.38		

Note 1 : Ambient temperature =25°C, and lamp current I_L = 6 mArms. To be measured in the dark room.

Note 2 :To be measured on the center area of panel with a viewing cone of 1 ° by Topcon luminance meter BM-5, after 10 minutes operation.

Note 3. Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “black” to “white” (falling time) and from “white” to “black” (rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

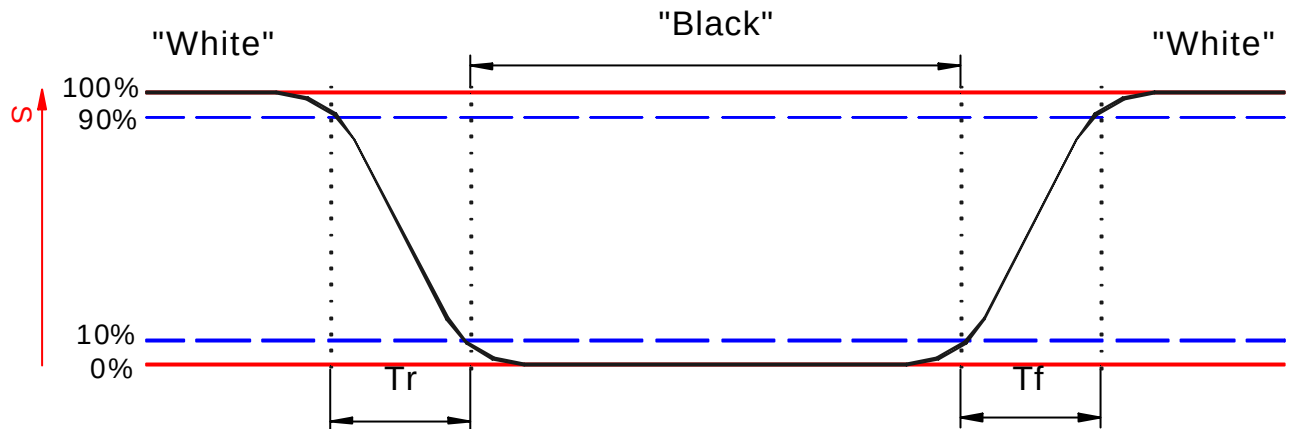

Note 4. Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 5. White $V_i = V_{i50} + 1.5V$

Black $V_i = V_{i50} \pm 2.0V$


" $\pm$ " means that the analog input signal swings in phase with V_{COM} signal.

— " $\mp$ " means that the analog input signal swings out of phase with V_{COM} signal.

V_{i50} : The analog input voltage when transmission is 50%

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 6. Definition of viewing angle, Refer to figure as below.

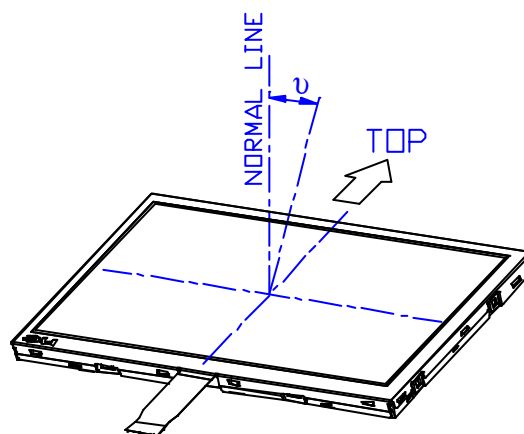


Note 7. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

D. Reliability test items(Note 2):

No.	Test items	Conditions	Remark
1	High temperature storage	Ta= 90°C 240Hrs	
2	Low temperature storage	Ta= -40°C 240Hrs	
3	High temperature operation	Ta= 70°C 240Hrs	
4	Low temperature operation	Ta= -20°C 240Hrs	
5	High temperature and high humidity	Ta= 60°C, 90% RH 240Hrs	Operation
6	Heat shock	-30°C~85°C/200 cycles 1Hrs/cycle	Non-operation
7	Electrostatic discharge	±200V,200pF(0Ω), once for each terminal	Non-operation
8	Vibration	Frequency range : 10~55Hz Stoke : 1.5mm Sweep : 10 ~ 55 ~ 10Hz 2 hours for each direction of X,Y,Z (6 hours for total)	JIS C7021, A-10 condition A
9	Mechanical shock	100G, 6ms, ±X,±Y,±Z 3 times for each direction	JIS C7021, A-7 condition C
10	Vibration (with carton)	Random vibration: 0.015G ² /Hz from 5~200Hz -6dB/octave from 200~500Hz	IEC 68-34
11	Drop (with carton)	Height: 60cm 1 corner, 3 edges, 6 surfaces	JIS Z0202

Note1: Ta: Ambient temperature.

Note 2: In the standard conditions, there is not display function NG issue occurred. All the cosmetic specification is judged before the reliability stress.

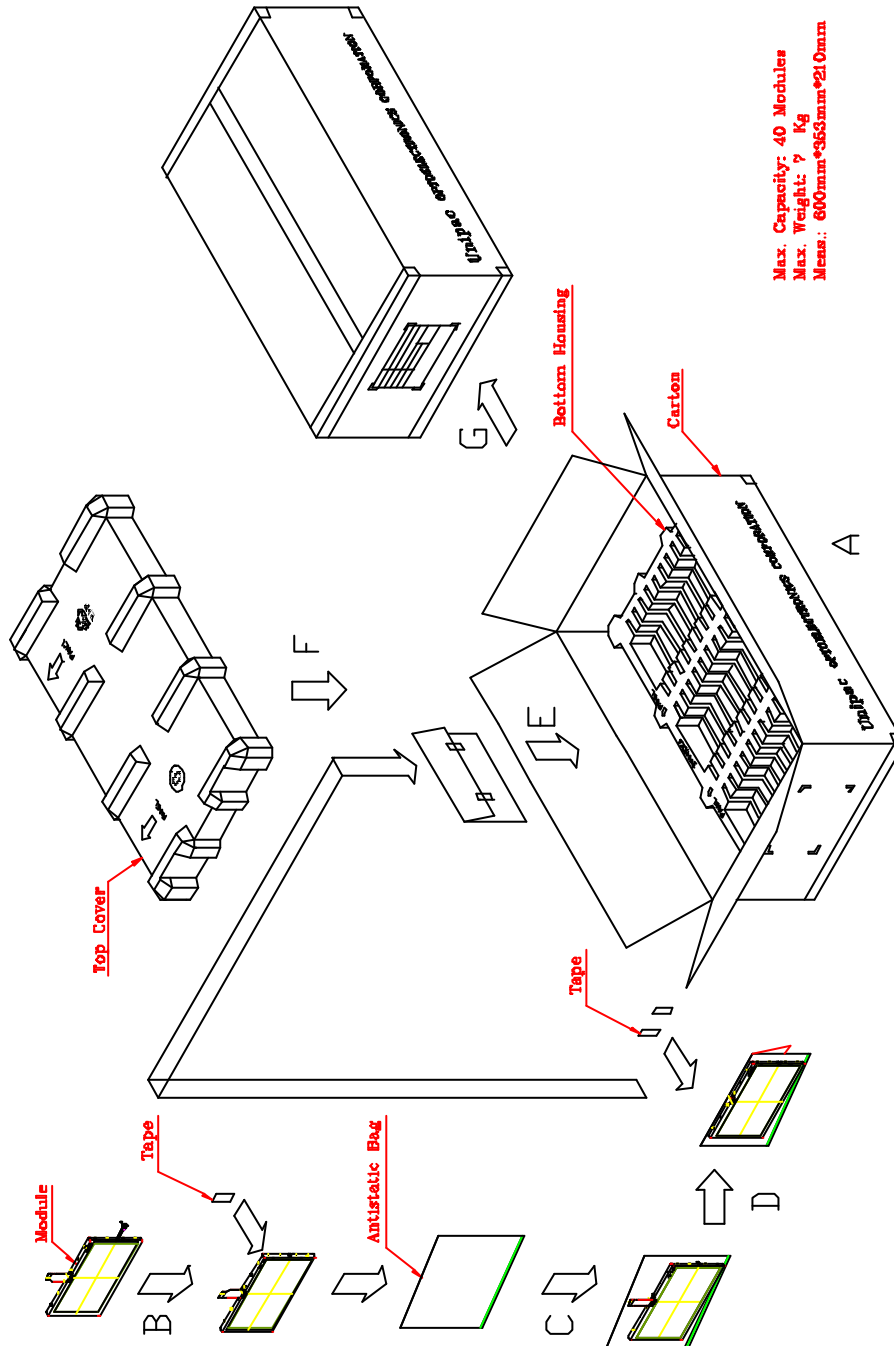


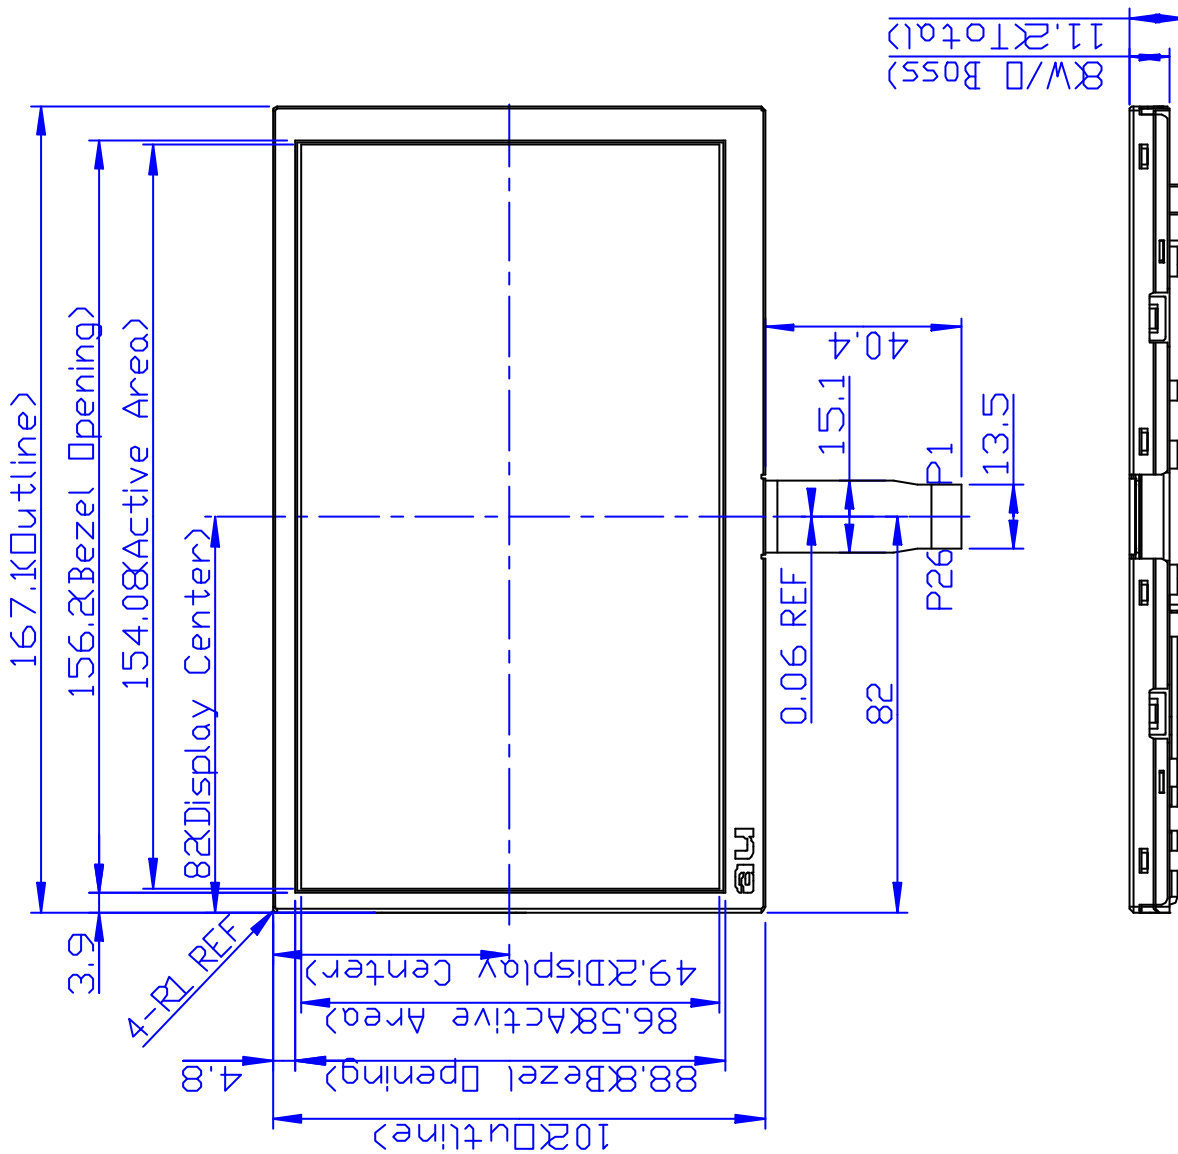


Fig.1-(a) Outline dimension of TFT-LCD module(Front side)



3-5 rue du Jura
Bâtiment Tokyo - Silic 586
94663 RUNGIS Cedex - FRANCE
Tél. : +33 (0) 1 49 78 88 88
Fax : + 33 (0) 1 49 78 88 89
www.axess-technology.com
contact@axess-technology.com

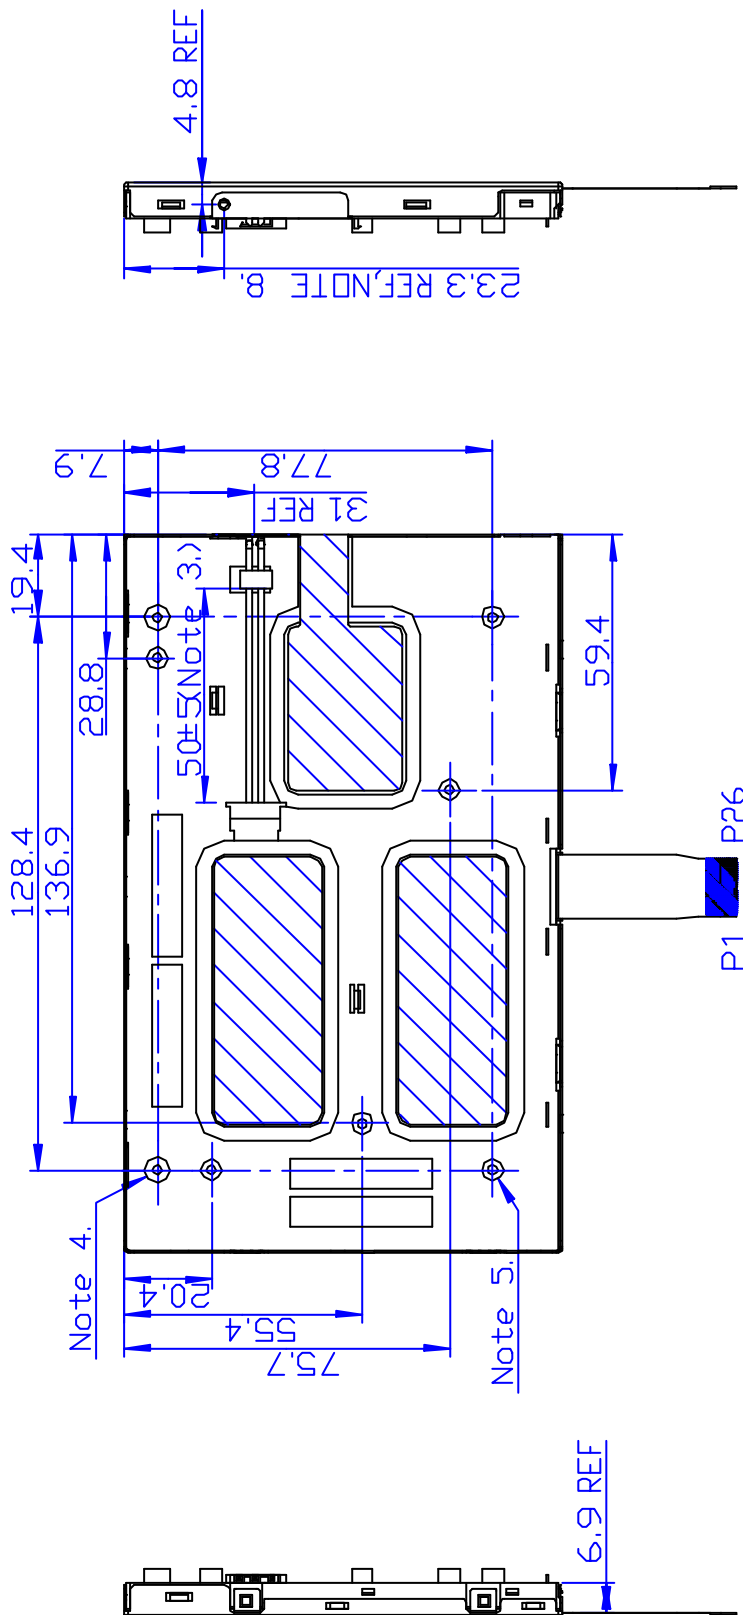

NOTES :

1. General Tolerance: ± 0.4 mm.
2. Lamp Connector: JST/BHR-03VS-1.
Mating Connector: JST/SM03(4.0)B-BHS-1-TB or Equivalent Part.
3. Lamp Connector Pinout: Pin 1.(HI/Color:Pink); Pin 3.(GND/Color:White)
4. Boss Spec(Q'ty:2): $\phi 6.0$ mm, $\phi 2.2$ mm-Hole, 3.3mm-Depth
5. Boss Spec(Q'ty:6): $\phi 5.0$ mm, $\phi 2.2$ mm-Hole, 3.3mm-Depth
6. Recommend Screw For Module Fixing: Tapping Screw $\phi 2.5$ mm L=3.0mm
Torque: 27.4 N cm
7.  Can Be Ground.
8. Ground Wire Fixed, Using M2.0xP0.4xL1.5 Screw.(Customer side)

Fig.1-(b) Outline dimension of TFT-LCD module(Rear side)

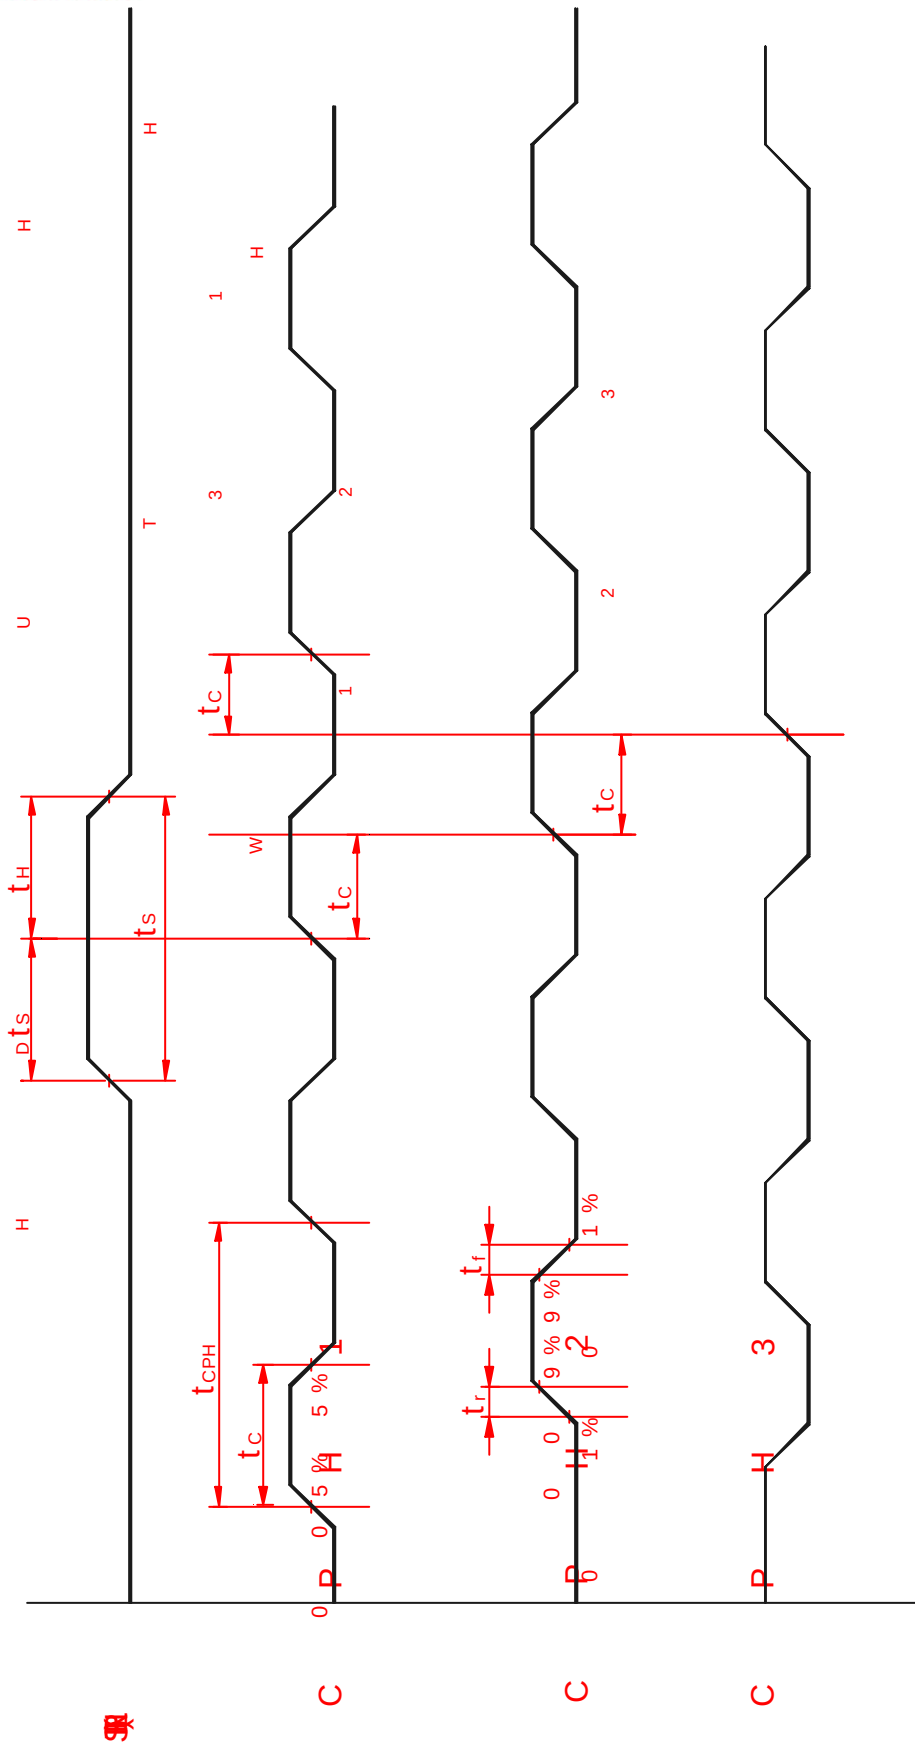


Fig.2 Sampling clock timing

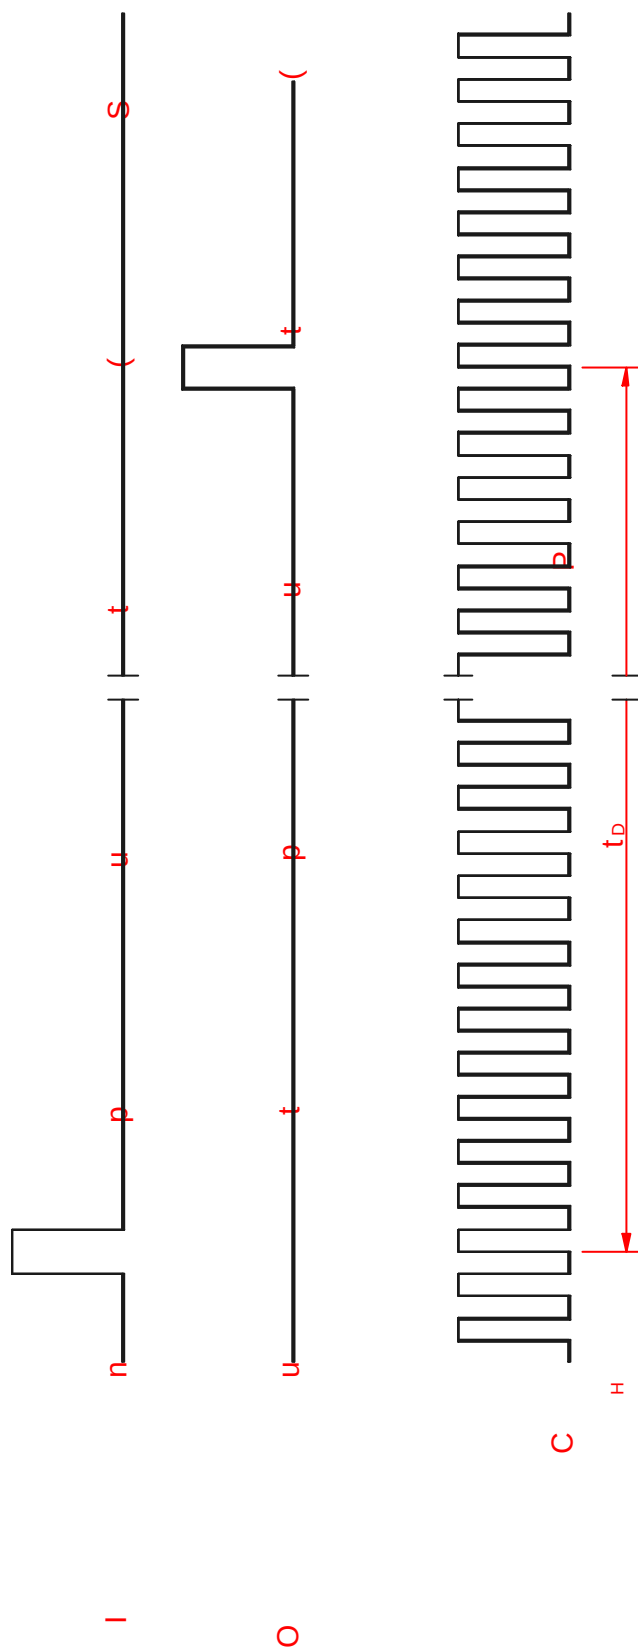


Fig.3 Horizontal display timing range





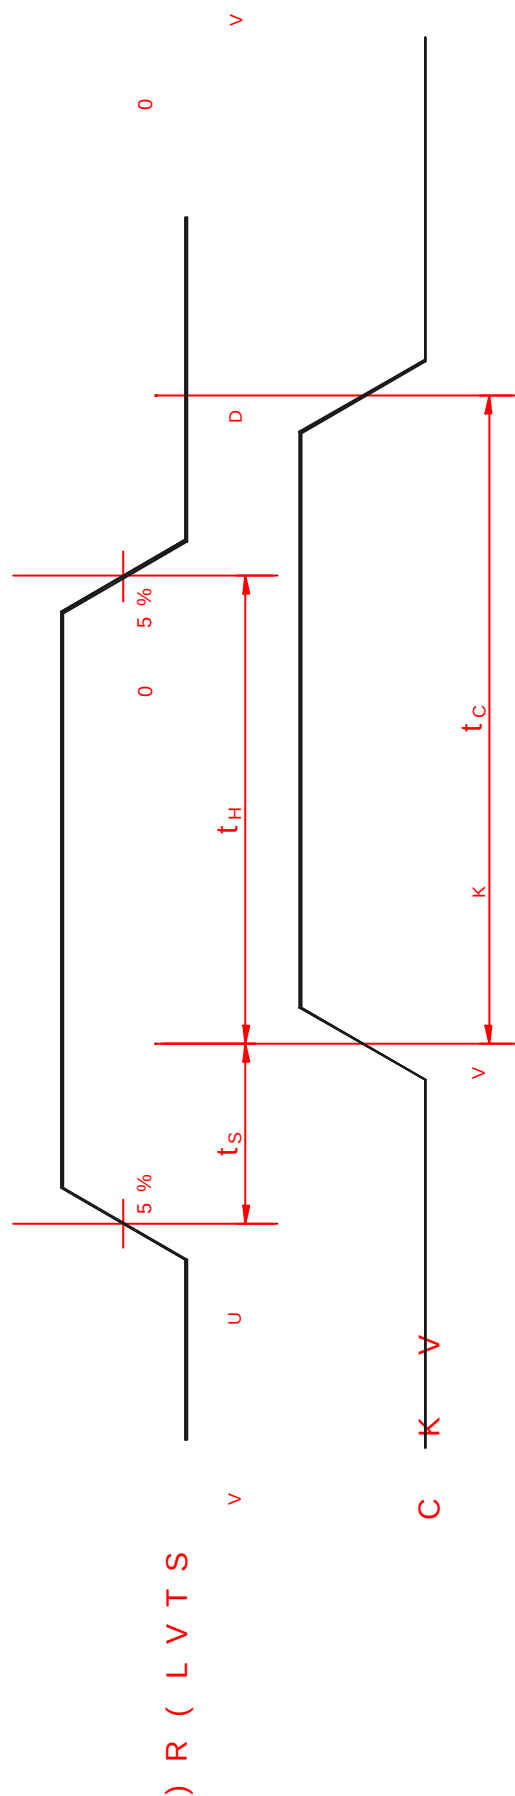


Fig.5 Vertical shift clock timing

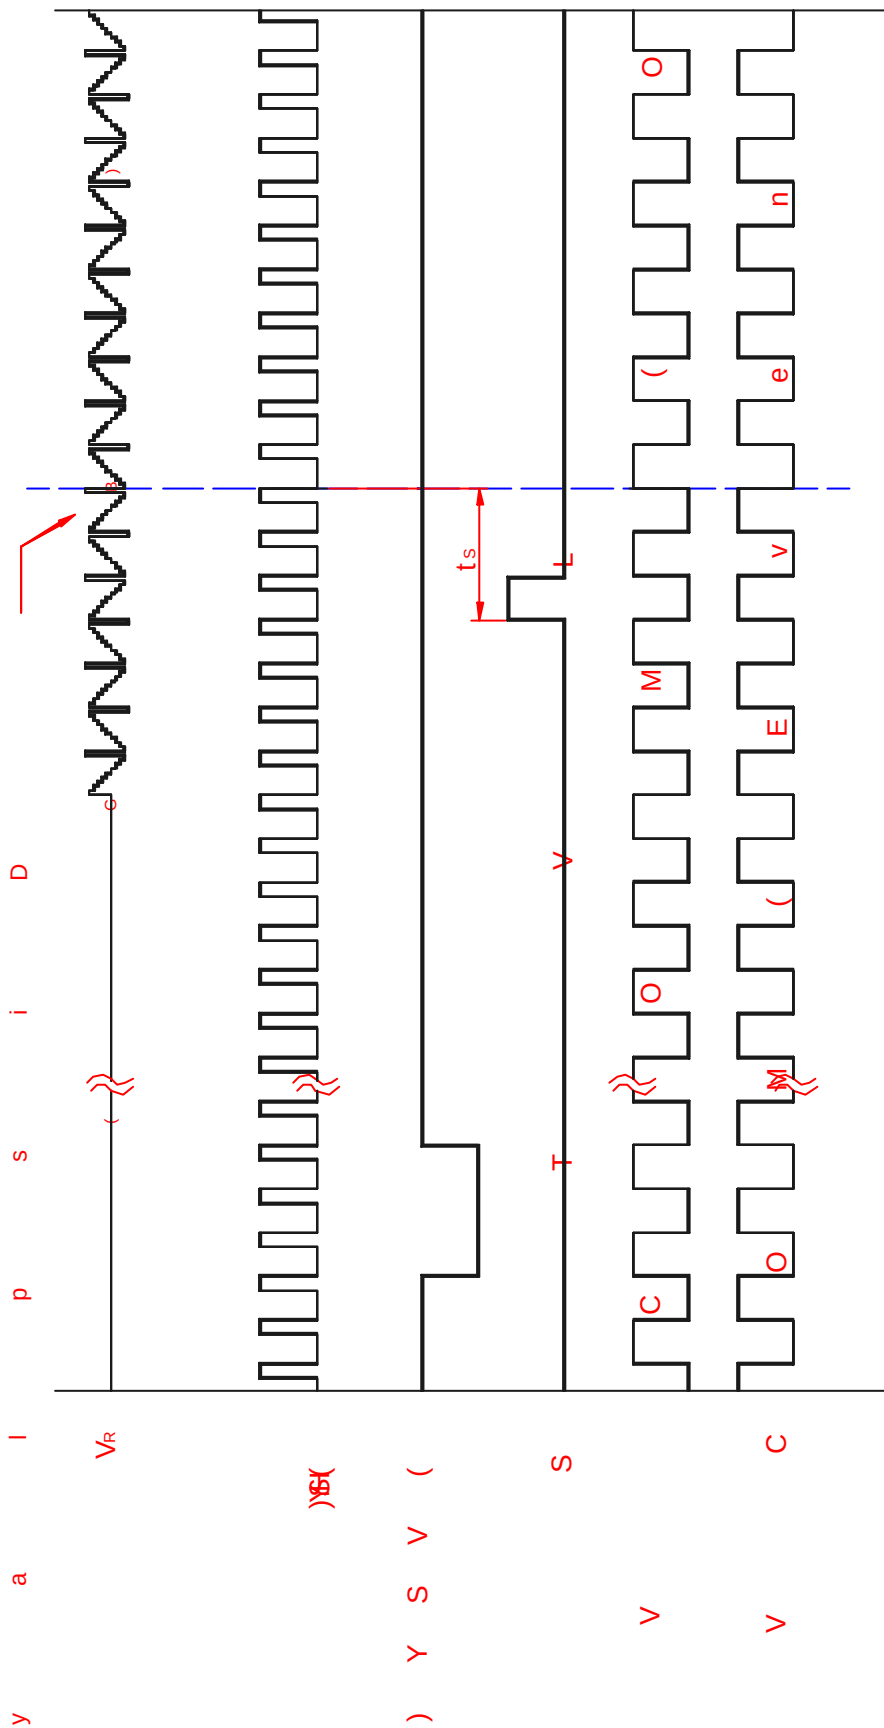


Fig.6-6(a) Vertical timing (From up to down)

